

Format

Dimensions (Ø or w x h x d) in mm

Case (material)	Plastic	PBT/PC
		ABS
	Metal	Nickel plated brass
		Stainless steel

Sensing distance Sn (m) related to system	Thru-beam	XU●2
	Diffuse short distance	XU●4
	Diffuse long distance	XU●5
	Diffuse medium distance	XU●6
	Background suppression	XU●8
	Polarised reflex	XU●9

LED emission

Degree of protection

Supply	≡ 3-wire (PNP/NPN)
	≡ 4-wire (PNP/NPN)
	≈ 5-wire, relay output

Function	NO
	NC
	NO/NC
	NO + NC

Connection	Pre-cabled	(L = 2 m)
	Connector	M8 (4-pin) ≡ 3-wire
		M12 (4-pin) ≡ 4-wire
	Pigtail	0.3 m

Type reference

Pages

Design 18, cylindrical miniature

Plastic	Metal
---------	-------



Ø 18, threaded M18 x 1 Length: 44	Ø 18, threaded M18 x 1 Length: 55.2	Ø 18, threaded M18 x 1 Length: 44	Ø 18, threaded M18 x 1 Length: 55.2
---	---	---	---

✓	–	–	–
–	–	–	–
–	–	✓	–
–	–	–	–

For straight light axis	For angled light axis	For straight light axis	For angled light axis
-------------------------	-----------------------	-------------------------	-----------------------

30	17	30	17
–	–	–	–
1	–	1	–
0.6	0.5	0.6	0.5
–	–	–	–
7	5.5	7	5.5

Red light

All: IP65, IP67
M12 connector only: IP69K

–	–	–	–
✓	–	✓	–
–	–	–	–
–	–	–	–
✓	✓	✓	✓
–	–	–	–
✓	✓	✓	✓
–	–	–	–
✓	✓	✓	✓
–	–	–	–

XUB

20

Miniature design		Hybrid miniature design	
Plastic		Plastic	
			
19.5 x 31.5 x 10.8		15 x 59.2 x 31.9	
✓		—	
—		✓	
—		—	
—		—	
With excess gain = 1	With excess gain = 2	With excess gain = 1	With excess gain = 2
30	24	30	20
0.25	0.17	—	—
1.9	1.5	1	0.7
1.1	0.8	0.6	0.42
4...300: White paper or object. Sn (90%)		—	
5...265: Grey object. Sn (18%)		—	
8...200: Black object. Sn (6%)		—	
0.05...8	0.05...6.7	7	5
Red light for: XUM2, XUM6, XUM8, XUM9		Red light	
Infrared light for: XUM4, XUM 5		—	
All: IP65, IP67		All: IP65, IP67 M12 connector only: IP69K	
✓		—	
—		✓	
—		—	
—		—	
—		—	
✓		✓	
—		—	
✓		✓	
✓		—	
—		✓	
✓		—	
XUM		XUN	
8		40	

Material handling, Material working, Packaging

Very dark object detection



Compact	Miniature	Sub-miniature
23 x 50 x 50	12 x 34 x 20	8 x 21.1 x 14.6
–	–	–
✓	✓	–
–	–	–
–	–	✓
–	–	–
–	–	–
–	–	–
BGS		
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	80 mm	50 mm
1200 mm	200 mm	100 mm
–	–	–
Blue light		
✓	✓	✓
✓	✓	–
12...24V	12...24V	12...24V for XUT7 24V for XUT8
–	–	–
–	–	–
–	XUM8ABAY●●	XUT8ABAY●●
✓	XUM7ABPX●●	XUT7ABPX●●
–	–	–
–	XUM7ABPX●●	✓
–	✓	–
✓	–	–
–	XUM8ABAY●●	–
–	–	✓
XUK8ABPX●●	XUM7ABPX●● XUM8ABAY●●	XUT7ABPX●● XUT8ABAY●●



Photo-electric sensors

XUM, general purpose, single mode function
Miniature design, plastic
Three-wire DC, solid-state output

Detection curves


Thru-beam system: XUM2

Lateral displacement

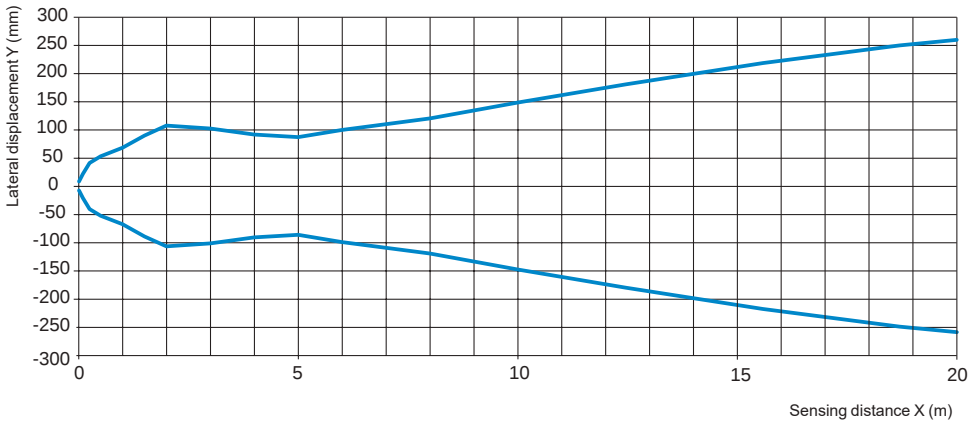


(1): Transmitter
(2): Receiver

Light beam diameter

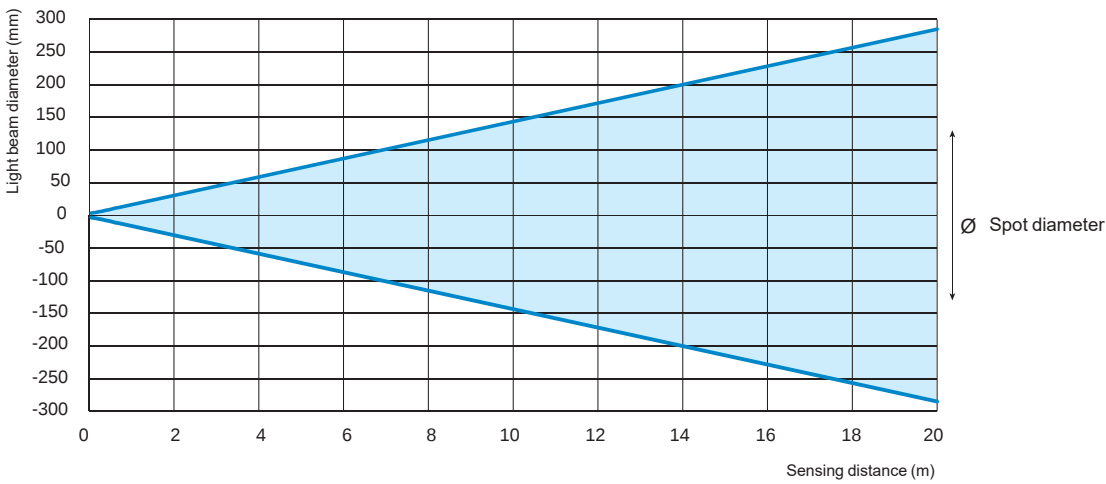



Excess gain

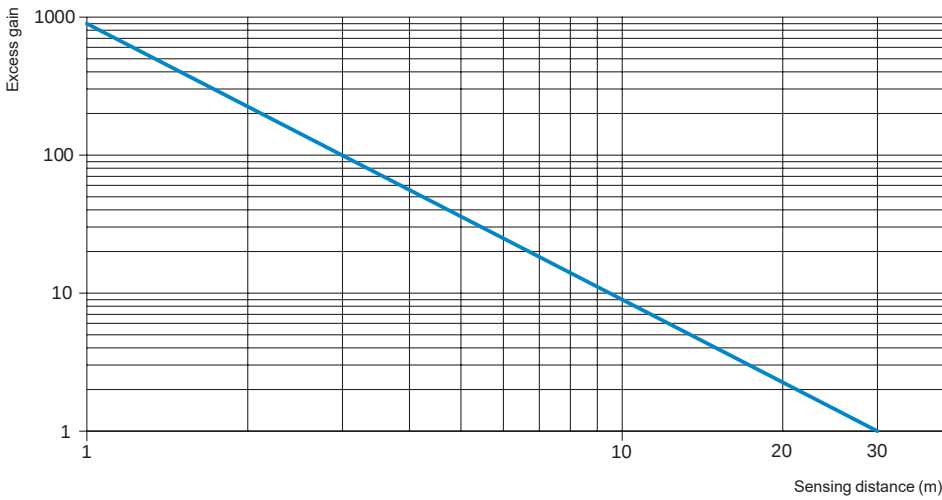

Detection curves (continued)



Background suppression system: XUM8

Lateral displacement (preset 100 mm)

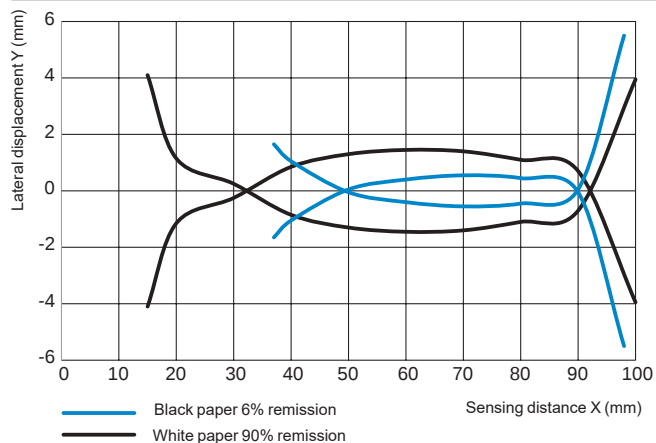


(1): Sensor
 (2): Object (200 mm square white and black mat paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

Lateral displacement (preset 200 mm)


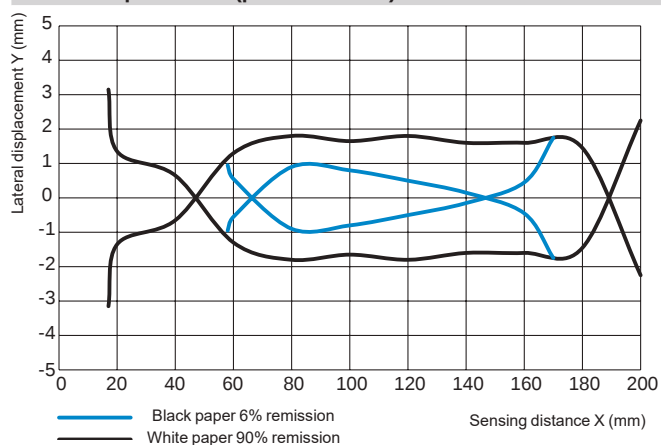


(1): Sensor
 (2): Object (200 mm square white and black mat paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

Light beam diameter

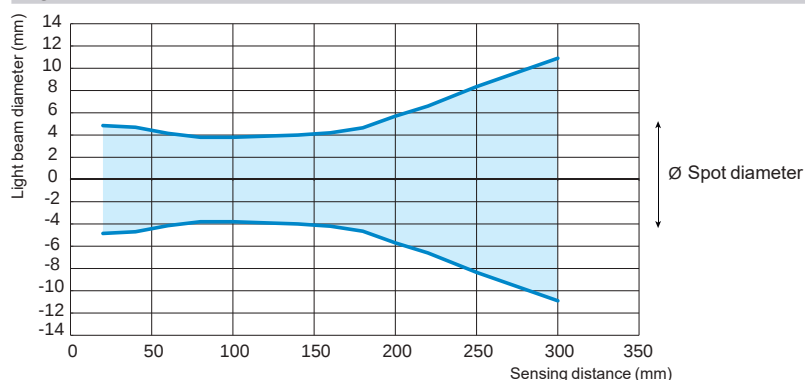

Minimum distance between the object to be detected and a white background


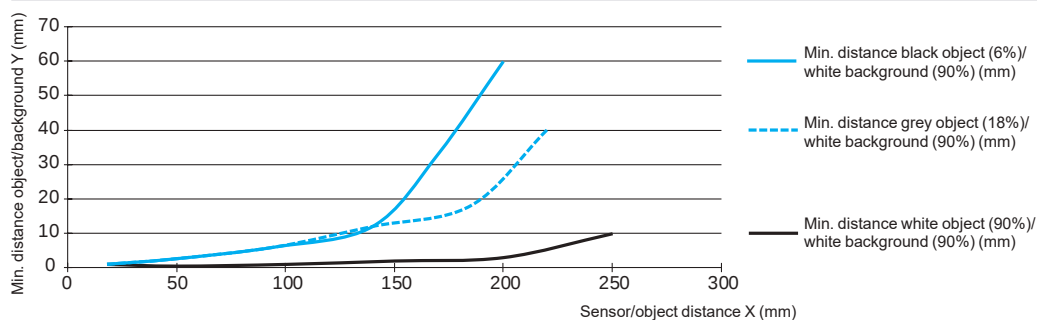


(1): Sensor
 (2): Object
 (3): Background
 X: Sensor/object distance (mm)
 Y: Min. distance object/background (mm)

Detection curves (continued)



Diffuse system: XUM4, XUM5 and XUM6

Object size/sensing distance

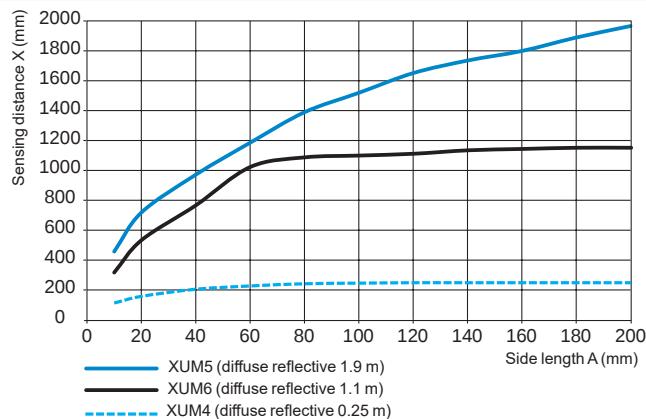

(1): Sensor
 (2): Object (white mat paper of A mm square)
 A: Side length (mm)
 X: Sensing distance (mm)

Lateral displacement

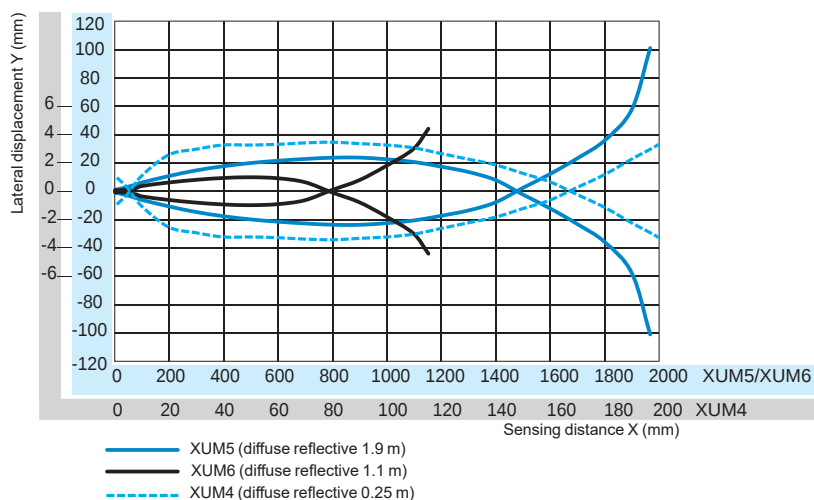

(1): Sensor
 (2): Object (200 x 200 mm square white paper)
 X: Sensing distance (mm)
 Y: Lateral displacement (mm)

Excess gain

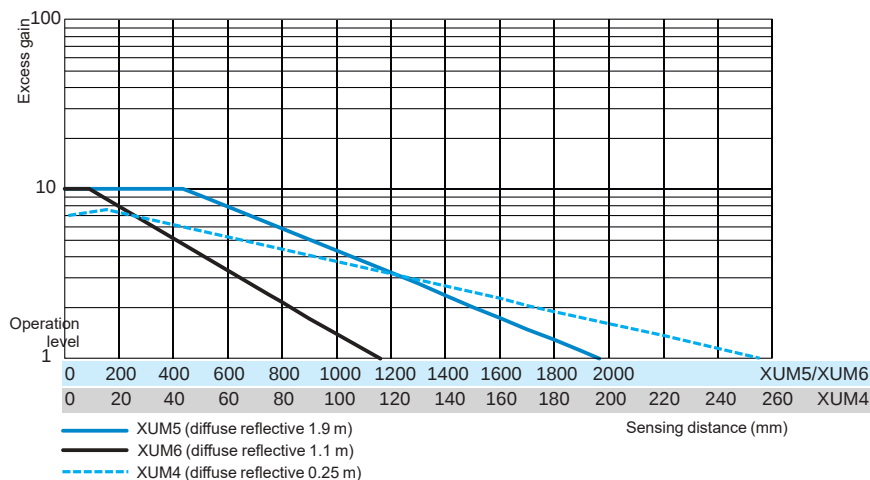


Photo-electric sensors

XUM, general purpose, single mode function

Miniature design, plastic



Three-wire DC, solid-state output

Diffuse system

Pre-cabled and pigtail versions

Description - XUM5A●XBL2,
XUM6A●XBL2, XUM4A●XBL2,
XUM●A●BL03●●

Dimensions - XUM5A●XBL2,
XUM6A●XBL2, XUM4A●XBL2,
XUM●A●BL03●●

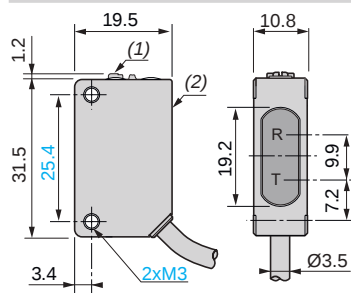

L = 2 m (pre-cabled)
0.3 m (pigtail)



(1) Output indicator (yellow)
(2) Setting potentiometer
(sensitivity)
(3) Stability indicator (green)

R: Reception
T: Transmission
(1) Setting potentiometer (sensitivity)
(2) Setting potentiometer (NO/NC)

M8 connector version

Description - XUM5A●XBM8,
XUM6A●XBM8, XUM4A●XBM8

Dimensions - XUM5A●XBM8,
XUM6A●XBM8, XUM4A●XBM8




(1) Output indicator (yellow)
(2) Setting potentiometer
(sensitivity)
(3) Stability indicator (green)

R: Reception
T: Transmission
(1) Setting potentiometer (sensitivity)
(2) Setting potentiometer (NO/NC)

Accessories

Setting-up accessory

XUZASM05



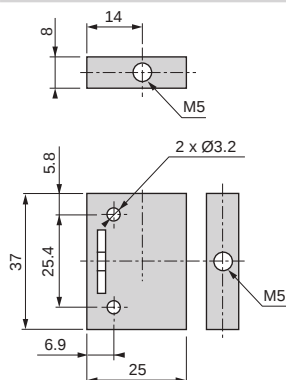


Diaphragms

XUZDVM●●

XUZDHM●●

XUZDRM●●



Reference a (mm)

XUZDVM05 0.5

XUZDVM10 1

XUZDVM20 2

XUZDHM05 0.5

XUZDHM10 1

XUZDHM20 2

XUZDRM05 Ø 0.5

XUZDRM10 Ø 1

XUZDRM20 Ø 2

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal

Four-wire DC, solid-state output

Wire setting for NO/NC



XUB2BKXNM12T

XUB2BKXWM12T



XUB2BKXNL2T

XUB2BKXWL2T

XUB2BPYNM12R
XUB2BNXNM12R
XUB2BPXNM12RXUB2BPYWM12R
XUB2BNXWM12R
XUB2BPXWM12RXUB2BNXNL2R
XUB2BPXNL2RXUB2BNXWL2R
XUB2BPXWL2R

Thru-beam system with adjustable sensitivity

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
Transmitter only (1)					
30 m/20 m Along case axis	—	—	Pre-cabled (L = 2 m)	XUB2BKXNL2T	0.095
			M12 connector (4-pin)	XUB2BKXNM12T	0.040
17 m/12 m 90° to case axis	—	—	Pre-cabled (L = 2 m)	XUB2BKXWL2T	0.095
			M12 connector (4-pin)	XUB2BKXWM12T	0.040

Receiver IO-Link only

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2BPYNM12R	0.040
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB2BPYWM12R	0.040

Receiver only

30 m/20 m Along case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB2BNXNL2R	0.095
			M12 connector (4-pin)	XUB2BNXNM12R	0.040
		PNP	Pre-cabled (L = 2 m)	XUB2BPXNL2R	0.095
			M12 connector (4-pin)	XUB2BPXNM12R	0.040
17 m/12 m 90° to case axis	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB2BNXWL2R	0.095
			M12 connector (4-pin)	XUB2BNXWM12R	0.040
		PNP	Pre-cabled (L = 2 m)	XUB2BPXWL2R	0.095
			M12 connector (4-pin)	XUB2BPXWM12R	0.040

Accessories

IO-Link Master

See page 78.

Fixing and other accessories

See page 82.

Cabling accessories

See page 88.

(1) All transmitters are compatible with the receivers listed below.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18, metal

Four-wire DC, solid-state output

Wire setting for NO/NC

Apollo_CP0720012



XUB•BPYNM12
XUB•BNXNM12
XUB•BPXNM12

Apollo_CP0720016



XUB6BPYWM12
XUB6BNXWM12
XUB6BPXWM12

Apollo_CP0720010



XUB•BNXNL2
XUB•BPXNL2

Apollo_CP0720014



XUB6BNXWL2
XUB6BPXWL2

Diffuse system with adjustable sensitivity, IO-Link

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
Long range, red LED emission					
1 m/0.7 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB5BPYNM12	0.040
Medium range, red LED emission					
0.6 m/0.42 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB6BPYNM12	0.040
0.5 m/0.35 m 90° to case axis	NO/NC (Light ON/Dark ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUB6BPYWM12	0.040

Diffuse system with adjustable sensitivity

Max./operating sensing distance (Sn)/Line of sight	Function	Output	Connection	Reference	Weight (kg)
Long range, red LED emission					
1 m/0.7 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB5BNXNL2	0.095
			M12 connector (4-pin)	XUB5BNXNM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB5BPXNL2	0.095
			M12 connector (4-pin)	XUB5BPXNM12	0.040
Medium range, red LED emission					
0.6 m/0.42 m Along case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB6BNXNL2	0.095
			M12 connector (4-pin)	XUB6BNXNM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB6BPXNL2	0.095
			M12 connector (4-pin)	XUB6BPXNM12	0.040
0.5 m/0.35 m 90° to case axis	NO/NC (Light ON/Dark ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUB6BNXWL2	0.095
			M12 connector (4-pin)	XUB6BNXWM12	0.040
		PNP	Pre-cabled (L = 2 m)	XUB6BPXWL2	0.095
			M12 connector (4-pin)	XUB6BPXWM12	0.040

Accessories

IO-Link Master

See page 78.

Fixing and other accessories

See page 82.

Cabling accessories

See page 88.

Photo-electric sensors

XUB general purpose, single mode function

Cylindrical miniature design 18


Four-wire DC, solid-state output

Wire setting for NO/NC

Diffuse system, plastic, M12 connector version


Line of sight: along case axis (axial)

XUB5ANXNM12, XUB6ANXNM12, XUB5APXNM12, XUB6APXNM12, XUB5APYNM12 and XUB6APYNM12

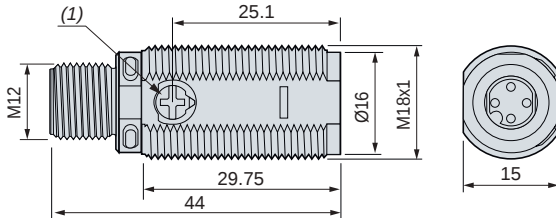

Line of sight: 90° to case axis (radial)


XUB6ANXWM12, XUB6APXWM12 and XUB6APYWM12

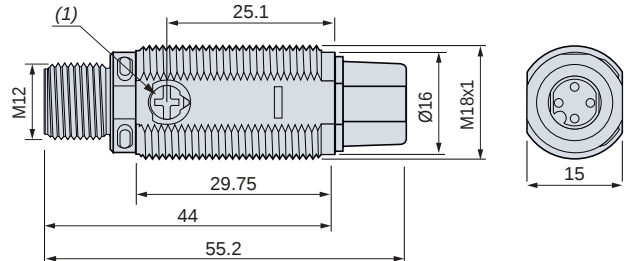

Diffuse system, plastic, pre-cabled version


Line of sight: along case axis (axial)

XUB5ANXNL2, XUB6ANXNL2, XUB5APXNL2 and XUB6APXNL2

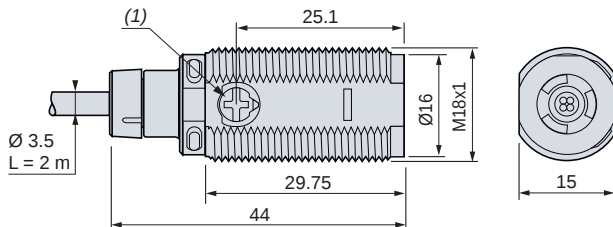

Line of sight: 90° to case axis (radial)


XUB6ANXWL2 and XUB6APXWL2

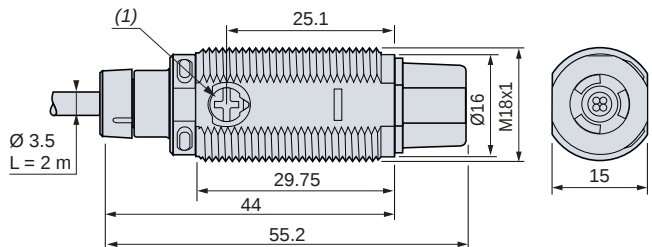

Diffuse system, metal, M12 connector version


Line of sight: along case axis (axial)

XUB5BNXNM12, XUB6BNXNM12, XUB5BPXNM12, XUB6BPXNM12, XUB5BPYNM12 and XUB6BPYNM12

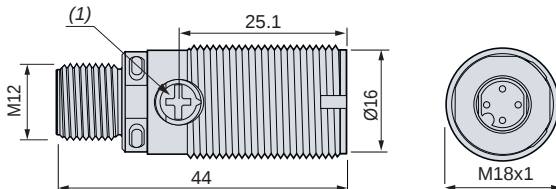

Line of sight: 90° to case axis (radial)


XUB6BNXWM12, XUB6BPXWM12 and XUB6BPYWM12

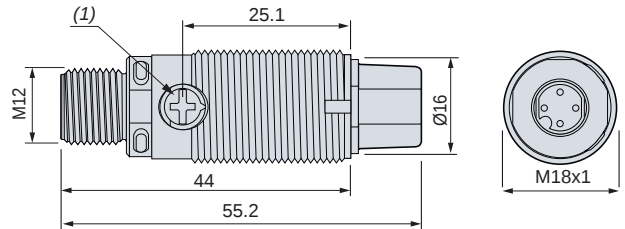

Diffuse system, metal, pre-cabled version


Line of sight: along case axis (axial)

XUB5BNXNL2, XUB6BNXNL2, XUB5BPXNL2 and XUB6BPXNL2

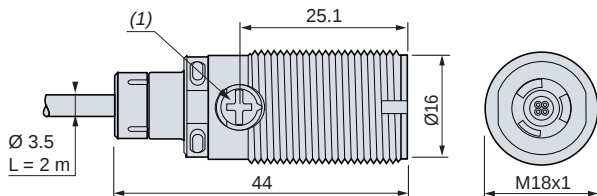

Line of sight: 90° to case axis (radial)

XUB6BNXWL2 and XUB6BPXWL2

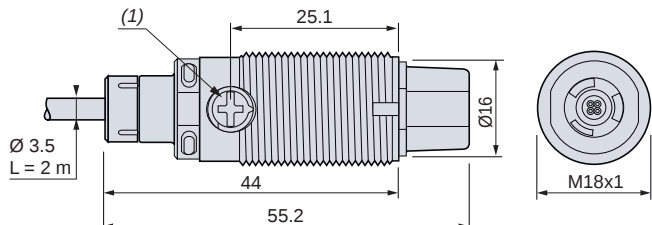

(1) Adjustment potentiometer (sensitivity).

Photo-electric sensors

XUN general purpose, single mode function

Hybrid miniature design, plastic, thru-beam system

Four-wire DC, solid-state output, wire setting for NO/NC



Thru-beam system with adjustable sensitivity

Max./operating sensing distance (Sn)	Function	Output	Connection	Reference	Weight (kg)
Transmitter + receiver IO-Link					
30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN2APYNM12	0.013

Transmitter + receiver					
30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUN2ANXNL2	0.040
			M12 connector (4-pin)	XUN2ANXNM12	0.013
		PNP	Pre-cabled (L = 2 m)	XUN2APXNL2	0.040
			M12 connector (4-pin)	XUN2APXNM12	0.013

Transmitter only (1)

30 m/20 m			Pre-cabled (L = 2 m)	XUN2AKXNL2T	0.040
			M12 connector (4-pin)	XUN2AKXNM12T	0.013

Receiver IO-Link only

30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire or IO-Link	Autodetect PNP/NPN	M12 connector (4-pin)	XUN2APYNM12R	0.013
-----------	--	--------------------	-----------------------	--------------	-------

Receiver

30 m/20 m	NO/NC (Dark ON/Light ON) configuration by wire	NPN	Pre-cabled (L = 2 m)	XUN2ANXNL2R	0.040
			M12 connector (4-pin)	XUN2ANXNM12R	0.013
		PNP	Pre-cabled (L = 2 m)	XUN2APXNL2R	0.040
			M12 connector (4-pin)	XUN2APXNM12R	0.013

Accessories

IO-Link Master

See page 78.

Fixing and other accessories

See page 82.

Cabling accessories

See page 88.

(1) All transmitters are compatible with the receivers listed below.

Characteristics				
Sensor type		XUN2APYNM12, XUN2APYNM12R, XUN2A●XNM12, XU2AKXNM12T, XUN2A●XNM12R, XUN5APYNM12, XUN5A●XNM12, XUN6APYNM12, XUN6A●XNM12, XUN9APYNM12, XUN9A●XNM12		XUN2A●XNL2, XUN2A●XNL2R, XUN2AKXNL2T, XUN5A●XNL2, XUN6A●XNL2, XUN9A●XNL2
Product certifications		CE, UKCA, cULus		
Connection	Connector		M12	–
	Pre-cabled		–	Length: 2 m
Sensing distance Excess gain = 1 : maximum sensing distance Excess gain = 2 : nominal sensing distance	Thru-beam system XUN2	m	30 (with excess gain = 1) 20 (with excess gain = 2)	
	Diffuse system XUN5 (using a white paper 200 x 200 mm)	m	1 (with excess gain = 1) 0.7 (with excess gain = 2)	
	Diffuse system XUN6 (using a white paper 200 x 200 mm)	m	0.6 (with excess gain = 1) 0.42 (with excess gain = 2)	
	Polarised reflex system XUN9 (using a 50 x 50 mm reflector XU2C50)	m	7 (with excess gain = 1) 5 (with excess gain = 2)	
Blind zone		mm	0 (white object and potentiometer max.)	
Sensing distance setting			Potentiometer 1 turn (+/- 220 degrees)	
Colour of detection light beam			Red	
Output type			PNP/NPN (or autodetect PNP/NPN with IO-Link)	
Hysteresis			2 % < H < 20 % at Sn	
Degree of protection	Conforming to IEC 60529		IP65, IP67	
	Conforming to DIN 40050-9		IP69K (M12 connector versions only)	
Artificial optical radiation	Conforming to IEC 62471		Class 0 (risk exempt)	
Radiated disturbances emissions	Conforming to EN 55011/CISPR 1		Class A	
Storage temperature		°C	-40...+70	
Operating temperature		°C	-30...+55	
Materials	Case		PBT/PC	
	Lens cover		PMMA	
	Transparent cover		ABS	
	Potentiometer screw		PA66	
	Cable		–	PVC
Vibration resistance	Conforming to IEC 60068-2-6		Frequency range: 10 to 55 Hz Acceleration: 7 gn	
Shock resistance	Conforming to IEC 60068-2-27		Peak acceleration: 30 gn Duration of the pulse: 11 ms	
Rated supply voltage		V	12...24 --- with protection against reverse polarity	
Voltage limits (including ripple)		V	10...30 ---	
Current consumption, no-load		mA	< 20/IO-Link: < 30	
Switching capacity		mA	100	
Voltage drop, closed state		V	< 2 max.	
Maximum switching frequency		Hz	1000	
Delays	First-up	ms	< 100/IO-Link : < 300	
	Response	ms	0.5 max.	
	Recovery	ms	0.5 max	

Photo-electric sensors

XUN general purpose, single mode function


Hybrid miniature design, plastic, thru-beam system

Four-wire DC, solid-state output, wire setting for NO/NC

Thru-beam system, plastic, pre-cabled version


Transmitter + receiver (common top, side and front views)

XUN2ANXNL2, XUN2APXNL2

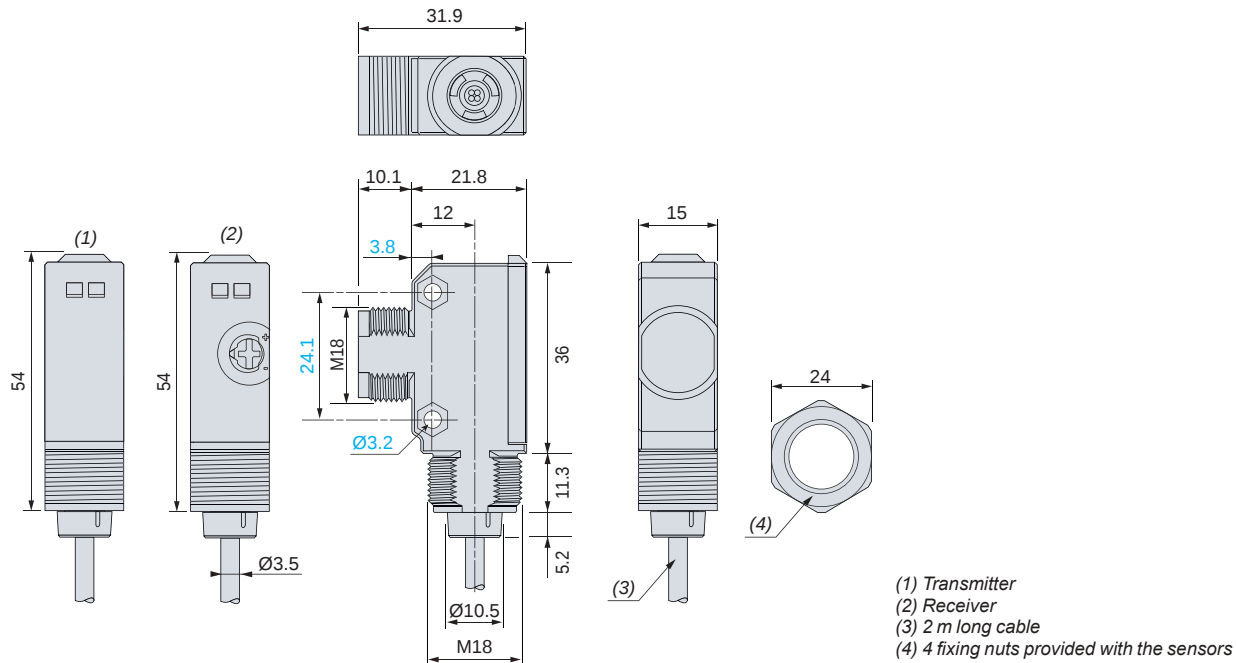

Transmitter only

XUN2AKXNL2T

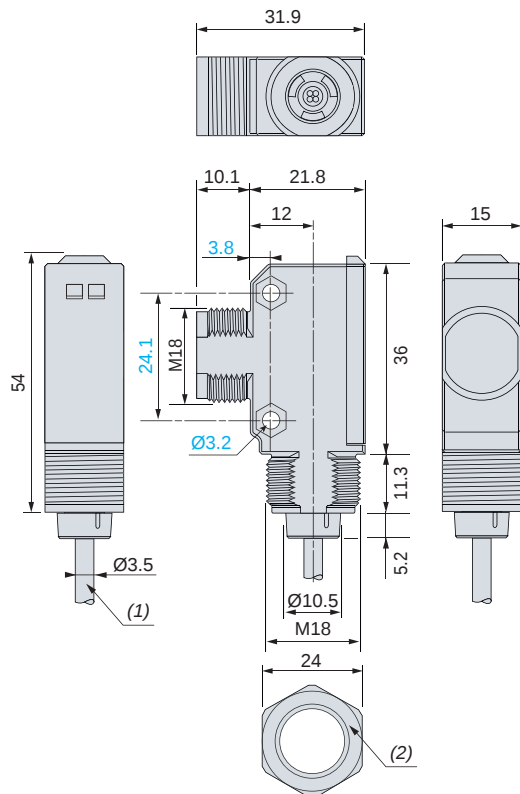

Receiver only

XUN2ANXNL2R, XUN2APXNL2R

