

## Interruptor de puerta con una luz integrada


7W



### Features

- Small size, high light efficiency.
- Smooth movement, stable performance.
- Switch life up to 1 million times.
- High quality nylon waterproof cable head.
- Precision stainless steel punch switch.
- High performance flame retardant ABS.

### Dimensions

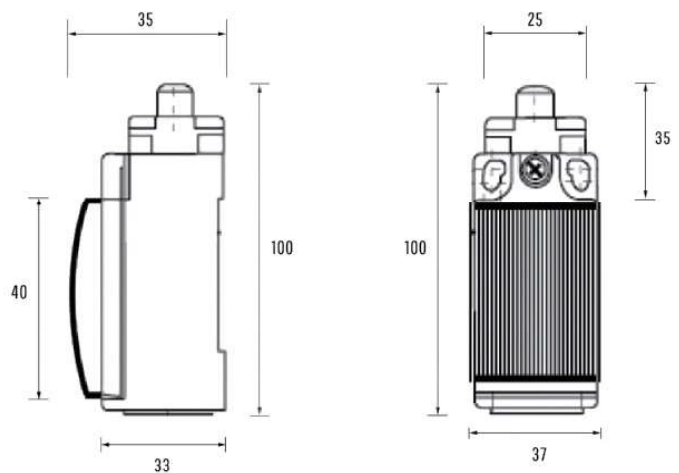

|                             |   |
|-----------------------------|---|
| Model No.                   | PCLS LED40  |
| Rated voltage               | AC 180-230 V  |
| Rated power                 | 7 W   |
| Luminous flux               | >600 LM   |
| Color temperature           | 6000-6500 K   |
| Mean life                   | 20,000 h  |
| Operating temperature range | -10-+70 °C  |
| Weight                      | 176g  |
| Dimensions                  | W37×D35×H100mm  |
| Switch Mode                 | Stroke (gated) switch                                       |
| Mounting                    | Screw fixing  |
| Cable length                | 2000mm  |
| Protection degree           | IP20  |
| Power interface             | Positive and negative pole (L/N)                            |
| Operation frequency         | Mechanical 120 operations/min, Electrical 30 operations/min |