New

Blaber pick

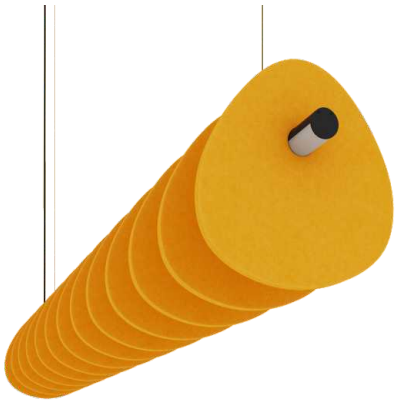

Blaber thickness: 12mm



Equipment

455x47x28mm



1.328/1.552/1.776/2.000mm

Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	25W / 30W / 34W / 38W
Lumens	2.250 lm - 5.320 lm
Installation	Pendant
Material	Aluminium
PCB	Flex (Fine 68)

Code	
Pendant	8

Diffuser (Angle)	
Opal (100°)	2
Transparent (30°)	4

Size	
1.328mm	2
1.552mm	3
1.776mm	4
2.000mm	9

CCT (lm/W)	
2.700K (130 lm/W)	2
3.000K (135 lm/W)	3
4.000K (140 lm/W)	4
1.800-4.000K (90 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
Black	6
Light gray	8
Orange	9
Light blue	C6
Yellow	D4
Beige	D6
Custom	C

Code: 8

*Create your code acording to your preferences. CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

Consult delivery terms and conditions.

Standard colors

6 8 9 C6 D4 D6

Custom

C

CE RoHS EMC

5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,55m Max | tuya | PUSH | DALI 2